

1N4933 THRU 1N4937



1.0 AMP FAST RECOVERY RECTIFIERS



FEATURES

- * Low forward voltage drop
- * Low leakage current
- * High reliability
- * High current capability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.34 grams


VOLTAGE RANGE

50 to 600 Volts

CURRENT

1.0 Ampere

DO-41

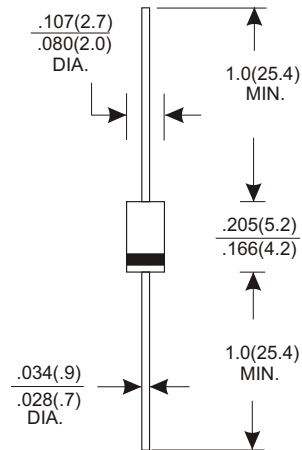

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unieess otherwies specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| TYPE NUMBER | 1N4933 | 1N4934 | 1N4935 | 1N4936 | 1N4937 | UNITS |
|---|------------|--------|--------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage | 50 | 100 | 200 | 400 | 600 | V |
| Maximum RMS Voltage | 35 | 70 | 140 | 280 | 420 | V |
| Maximum DC Blocking Voltage | 50 | 100 | 200 | 400 | 600 | V |
| Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Ta=75°C | 1.0 | | | | | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 30 | | | | | A |
| Maximum Instantaneous Forward Voltage at 1.0A | 1.2 | | | | | V |
| Maximum DC Reverse Current Ta=25°C | 5.0 | | | | | μA |
| at Rated DC Blocking Voltage Ta=100°C | 100 | | | | | μA |
| Maximum Reverse Recovery Time (Note 1) | 200 | | | | | nS |
| Typical Junction Capacitance (Note 2) | 15 | | | | | pF |
| Operating and Storage Temperature Range Tj, Tstg | -65 — +150 | | | | | °C |

NOTES:

- Reverse Recovery Time test condition: IF=1.0A, VR=30V.
- Measured at 1MHz and applied reverse voltage of 4.0V D.C.

RATING AND CHARACTERISTIC CURVES (1N4933 THRU 1N4937)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

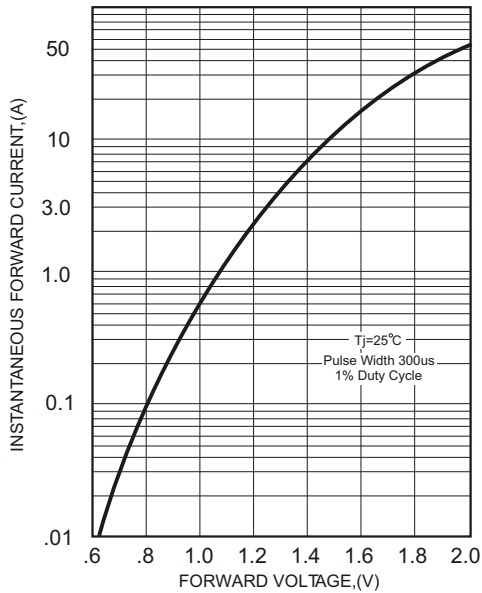


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

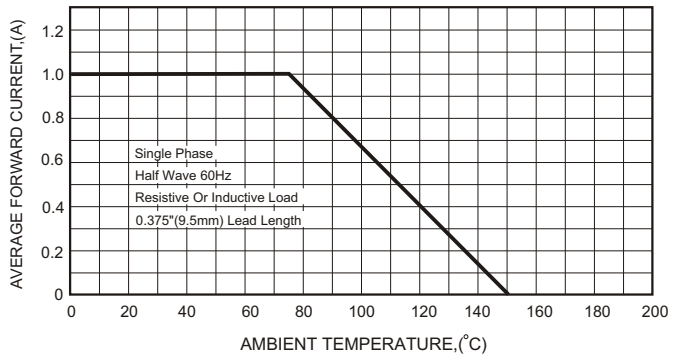


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


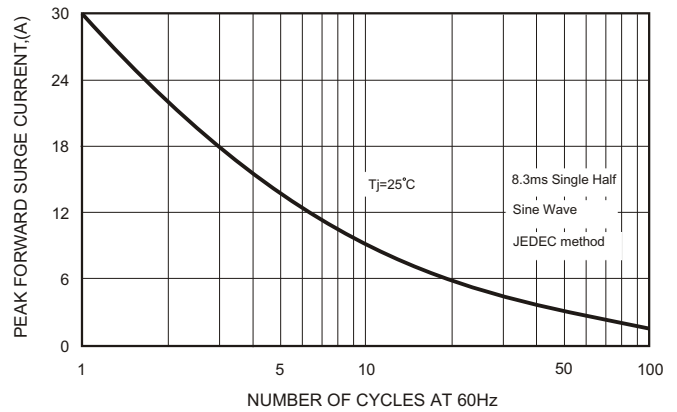


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

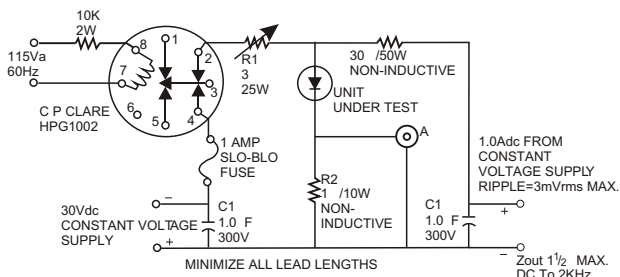

A-TEKTRONIX 545A, K PLUG IN
PRE AMP P6000 PROBE OR EQUIVALENT
R1- ADJUSTED FOR 14 BETWEEN POINT 2 OF RELAY AND RECTIFIER INDUCTIVE=3.8 H

R2- TEN 1W 10 1% CARBON CORE IN PARALLEL
 $T_A = 25 \pm 10^\circ\text{C}$ FOR RECTIFIER

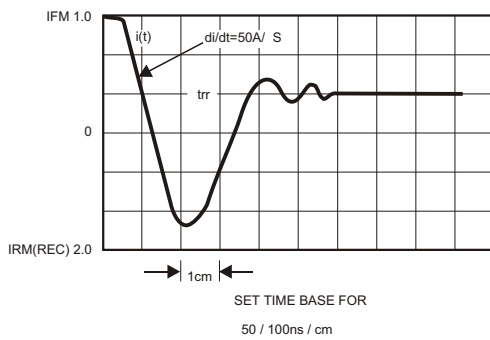


FIG.5-TYPICAL JUNCTION CAPACITANCE

